




MORRIS
springs

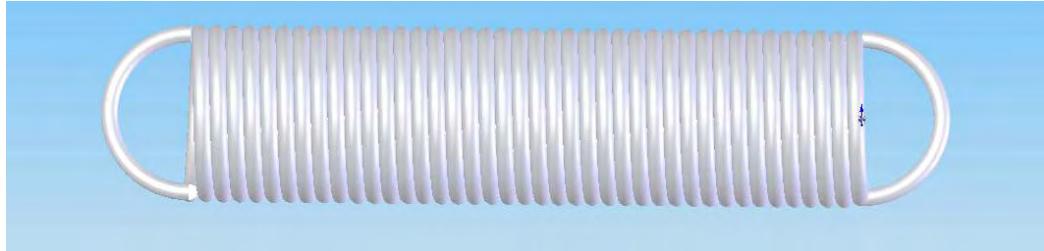

STEEL EXTENSION SPRINGS

FROM STOCK

When ordering it is necessary to specify the full spring reference number.

See also our range of assorted boxes.



All orders subject to a Carriage Charge

Spring No.	Length Inside Loops		Outside Diameter		Wire Dia			Approx. Load In		With Extension Of	
	Ins.	mm	Ins.	mm	SWG	Ins.	mm	lb	kg	Ins.	mm
MSE 289	0.75	19	0.19	4.8	28	0.0148	0.38	0.5	0.23	1.25	32
MSE 290	1.00	25	0.19	4.8	28	0.0148	0.38	0.5	0.23	2.0	51
MSE 291	1.50	38	0.19	4.8	28	0.0148	0.38	0.5	0.23	3.0	76
MSE 292	2.00	51	0.19	4.8	28	0.0148	0.38	0.5	0.23	4.5	115
MSE 293	0.75	19	0.19	4.8	26	0.018	0.45	1	0.46	0.75	19
MSE 294	1.00	25	0.19	4.8	26	0.018	0.45	1	0.46	1.25	32
MSE 295	1.50	38	0.19	4.8	26	0.018	0.45	1	0.46	2.25	56
MSE 296	2.00	51	0.19	4.8	26	0.018	0.45	1	0.46	3.0	76
MSE297	0.75	19	0.19	4.8	24	0.022	0.56	2	0.90	0.5	13
MSE298	1.00	25	0.19	4.8	24	0.022	0.56	2	0.90	0.75	19
MSE299	1.50	38	0.19	4.8	24	0.022	0.56	2	0.90	1.5	38
MSE300	2.00	51	0.19	4.8	24	0.022	0.56	2	0.90	2.0	51
MSE 301	1.5	38	0.25	6.4	23	0.024	0.61	2	0.90	2.0	51
MSE 302	2.0	51	0.25	6.4	23	0.024	0.61	2	0.90	3.5	89
MSE 303	2.5	64	0.25	6.4	23	0.024	0.61	2	0.90	4.5	115
MSE 304	3.0	76	0.25	6.4	23	0.024	0.61	2	0.90	6.0	153
MSE 305	1.5	38	0.25	6.4	21	0.032	0.81	5	2.3	1.0	25
MSE 306	2.0	51	0.25	6.4	21	0.032	0.81	5	2.3	1.5	38
MSE 307	2.5	64	0.25	6.4	21	0.032	0.81	5	2.3	2.0	51
MSE 308	3.0	76	0.25	6.4	21	0.032	0.81	5	2.3	2.5	64
MSE 309	1.5	38	0.25	6.4	19	0.040	1.0	10	4.6	0.5	13
MSE 310	2.0	51	0.25	6.4	19	0.040	1.0	10	4.6	1.0	25
MSE 311	2.5	64	0.25	6.4	19	0.040	1.0	10	4.6	1.25	32
MSE 312	3.0	76	0.25	6.4	19	0.040	1.0	10	4.6	1.5	38

Spring No.	Length Inside Loops		Outside Diameter		Wire Dia			Approx. Load In		With Extension Of	
	Ins.	mm	Ins.	mm	SWG	Ins.	mm	lb	kg	Ins.	mm
MSE 313	2.0	51	0.38	9.5	20	0.036	0.91	5	2.3	2.75	70
MSE 314	2.5	64	0.38	9.5	20	0.036	0.91	5	2.3	4.0	102
MSE 315	3.0	76	0.38	9.5	20	0.036	0.91	5	2.3	5.0	128
MSE 316	4.0	102	0.38	9.5	20	0.036	0.91	5	2.3	7.0	178
MSE 317	2.0	51	0.38	9.5	18	0.048	1.2	15	7.0	1.5	38
MSE 318	2.5	64	0.38	9.5	18	0.048	1.2	15	7.0	2.0	51
MSE 319	3.0	76	0.38	9.5	18	0.048	1.2	15	7.0	2.5	64
MSE 320	4.0	102	0.38	9.5	18	0.048	1.2	15	7.0	3.5	89
MSE321	2.0	51	0.38	9.5	16	0.064	1.6	30	14	0.75	19
MSE322	2.5	64	0.38	9.5	16	0.064	1.6	30	14	1.0	25
MSE323	3.0	76	0.38	9.5	16	0.064	1.6	30	14	1.25	32
MSE324	4.0	102	0.38	9.5	16	0.064	1.6	30	14	1.75	45
MSE325	3.0	76	0.5	13	18	0.048	1.2	10	4.6	4.5	115
MSE326	4.0	102	0.5	13	18	0.048	1.2	10	4.6	6.5	165
MSE327	5.0	128	0.5	13	18	0.048	1.2	10	4.6	8.5	216
MSE328	6.0	153	0.5	13	18	0.048	1.2	10	4.6	10.5	268
MSE329	3.0	76	0.5	13	16	0.064	1.6	20	9.0	2.25	57
MSE330	4.0	102	0.5	13	16	0.064	1.6	20	9.0	3.25	83
MSE331	5.0	128	0.5	13	16	0.064	1.6	20	9.0	4.5	115
MSE332	6.0	153	0.5	13	16	0.064	1.6	20	9.0	5.5	140
MSE 333	3.0	76	0.5	13	14	0.080	2.0	45	20	1.25	32
MSE 334	4.0	102	0.5	13	14	0.080	2.0	45	20	1.75	45
MSE 335	5.0	128	0.5	13	14	0.080	2.0	45	20	2.5	64
MSE 336	6.0	153	0.5	13	14	0.080	2.0	45	20	3.5	76

Spring No.	Length Inside Loops		Outside Diameter		Wire Dia			Approx. Load In		With Extension Of	
	Ins.	mm	Ins.	mm	SWG	Ins.	mm	lb	kg	Ins.	mm
MSE 337	4.0	102	0.75	19	15	0.072	1.8	20	9	5.5	140
MSE 338	5.0	128	0.75	19	15	0.072	1.8	20	9	7.75	197
MSE 339	6.0	153	0.75	19	15	0.072	1.8	20	9	10	255
MSE 340	7.0	178	0.75	19	15	0.072	1.8	20	9	12	306
MSE341	4.0	102	0.75	19	13	0.092	2.3	45	20	3.0	76
MSE342	5.0	128	0.75	19	13	0.092	2.3	45	20	4.0	102
MSE343	6.0	153	0.75	19	13	0.092	2.3	45	20	5.5	140
MSE344	7.0	178	0.75	19	13	0.092	2.3	45	20	6.5	165
MSE 345	5.0	128	0.75	19	11	0.116	2.9	90	41	2.5	64
MSE 346	6.0	154	0.75	19	11	0.116	2.9	90	41	3.0	76
MSE 347	7.0	178	0.75	19	11	0.116	2.9	90	41	3.75	96
MSE 348	8.0	204	0.75	19	11	0.116	2.9	90	41	4.5	115
MSE349	6.0	154	1	25	12	0.104	2.6	50	23	7.25	184
MSE350	7.0	178	1	25	12	0.104	2.6	50	23	9.25	229
MSE351	8.0	204	1	25	12	0.104	2.6	50	23	11.1	280
MSE352	9.0	229	1	25	12	0.104	2.6	50	23	12.6	318
MSE 353	6.0	154	1	25	10	0.128	3.2	90	41	4.5	115
MSE 354	7.0	178	1	25	10	0.128	3.2	90	41	5.5	140
MSE 355	8.0	204	1	25	10	0.128	3.2	90	41	6.5	165
MSE 356	9.0	229	1	25	10	0.128	3.2	90	41	7.5	191